


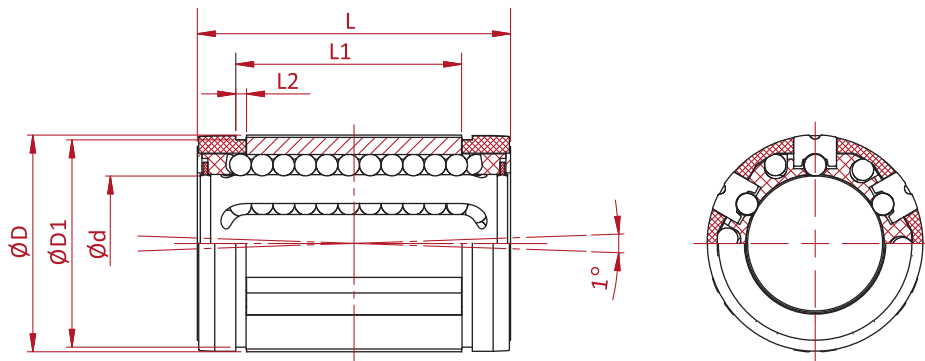


Typ	Ød	ØD	L	L1	L2	ØD1	W	(°)	G	J	Nośn. dyn. C [N]	Nośn. stat. C ₀ [N]	Masa [kg]
SPM-12	12	22	32	22,6	1,3	21,0	7,0	70	-	0,7	1060	1170	0,02
SPM-16	16	26	36	24,6	1,3	24,9	9,8	70	-	1,0	1280	1410	0,03
SPM-20	20	32	45	31,2	1,6	30,3	10,5	58	-	1,0	2100	2310	0,06
SPM-25	25	40	58	43,7	1,85	37,5	13,0	60	1,5	1,5	4130	4540	0,13
SPM-30	30	47	68	51,7	1,85	44,5	15,3	60	2,0	2,2	5020	5520	0,19
SPM-40	40	62	80	60,3	2,15	59,0	21,4	58	1,5	2,7	8620	9480	0,36
SPM-50	50	75	100	77,3	2,65	71,5	24,0	55	2,5	2,7	12060	13270	0,66

Wszystkie wymiary w tabeli w [mm], jeśli nie podano innej jednostki


- Nośność dynamiczna C szacowana na dystansie 50km.
- Dla wałków prowadzących o niższej twardości, nośności efektywne wynoszą:
 - dla WRA: $C_{\text{eff}} = 0,74 \cdot C$ $C_{\text{def}} = 0,8 \cdot C_0$
 - dla WRB: $C_{\text{eff}} = 0,63 \cdot C$ $C_{\text{def}} = 0,7 \cdot C_0$

Sposób oznaczania


SPM - 20 - OPN - WW

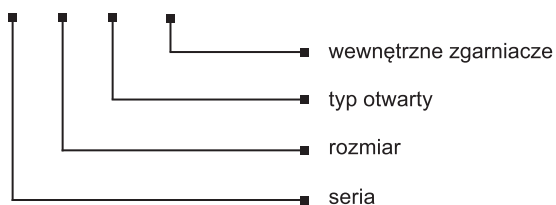


SPM12-OPN



SPM16-OPN, SPM20-OPN



SPM25-OPN



SPM30-OPN, SPM40-OPN

