
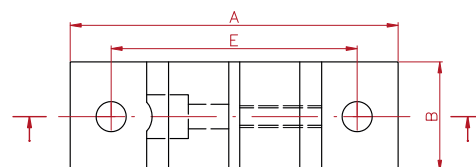


# Wsporniki końcowe wałków Seria standardowa

# IGWK

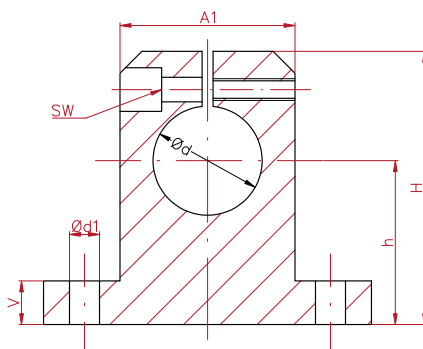

| Typ            | Ød<br>H8 | H    | h<br>±0,02 | A   | A1 | B  | E<br>±0,15 | Ød1  | V    | SW | Masa<br>[kg] |
|----------------|----------|------|------------|-----|----|----|------------|------|------|----|--------------|
| <b>IGWK-08</b> | 8        | 32,8 | 20         | 42  | 18 | 14 | 32         | 5,5  | 6,0  | 4  | 0,024        |
| <b>IGWK-10</b> | 10       | 32,8 | 20         | 42  | 18 | 14 | 32         | 5,5  | 6,0  | 4  | 0,024        |
| <b>IGWK-12</b> | 12       | 37,5 | 23         | 42  | 20 | 14 | 32         | 5,5  | 6,0  | 4  | 0,03         |
| <b>IGWK-16</b> | 16       | 44   | 27         | 48  | 25 | 16 | 38         | 5,5  | 8,0  | 4  | 0,04         |
| <b>IGWK-20</b> | 20       | 51   | 31         | 60  | 30 | 20 | 45         | 6,6  | 10,0 | 5  | 0,07         |
| <b>IGWK-25</b> | 25       | 60   | 35         | 70  | 38 | 24 | 56         | 6,6  | 12,0 | 6  | 0,13         |
| <b>IGWK-30</b> | 30       | 70   | 42         | 84  | 44 | 28 | 64         | 9,0  | 12,0 | 6  | 0,18         |
| <b>IGWK-35</b> | 35       | 82   | 50         | 98  | 50 | 32 | 74         | 11,0 | 16,0 | 8  | 0,27         |
| <b>IGWK-40</b> | 40       | 96   | 60         | 114 | 60 | 36 | 90         | 11,0 | 15,0 | 8  | 0,42         |

Wszystkie wymiary w tabeli w [mm], jeśli nie podano innej jednostki