



3.2 Technical data and options

MR Size 100


MR S 100 Drawings

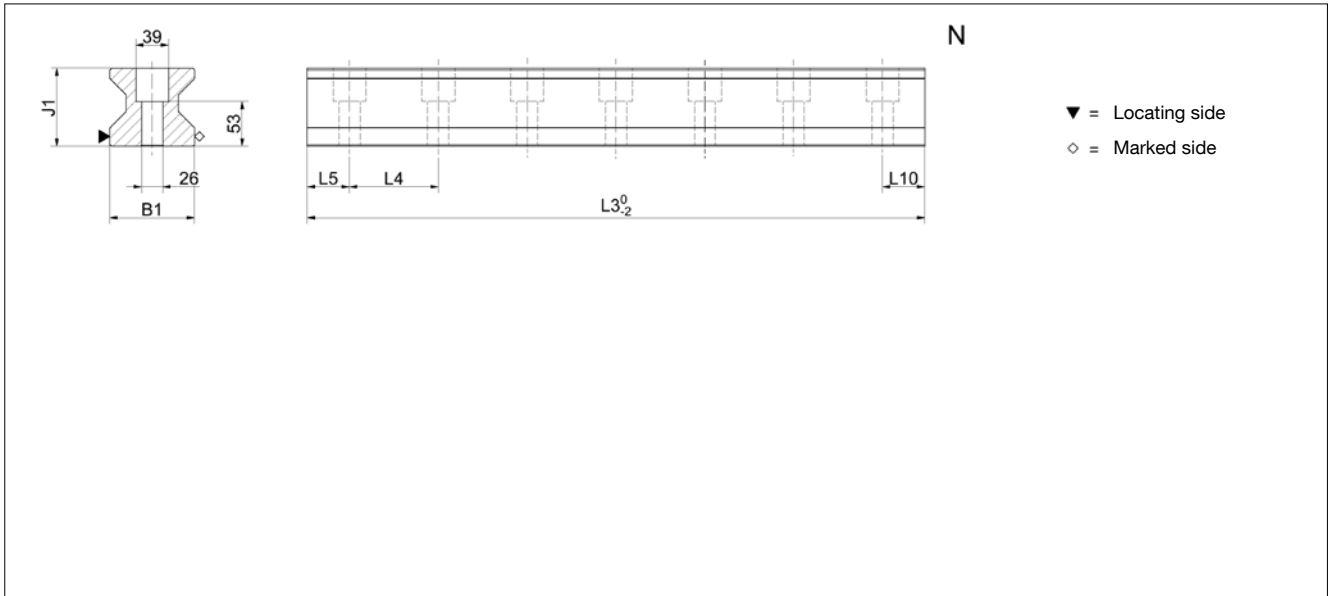


MR W 100 Drawings

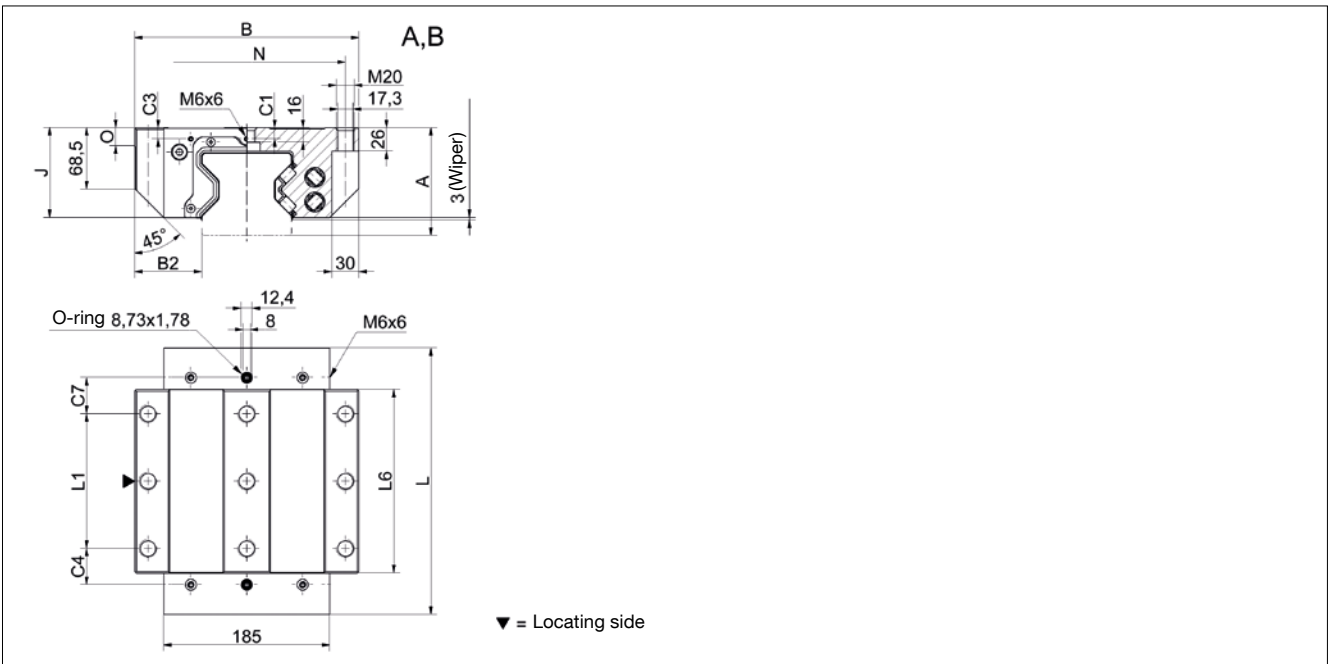

MR W 100 Rigidity diagram

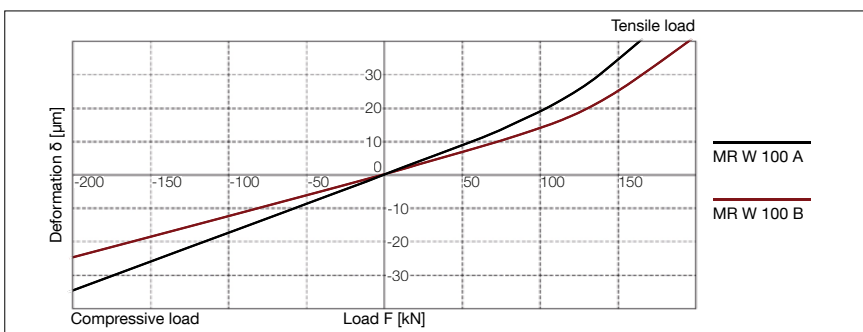


MR W 100 Load rating

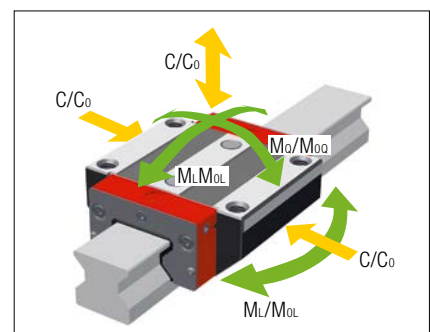

3.2 Technical data and options

MR Size 100

MR S 100 Dimensions



	MR S 100-N			
B1: Rail width	100			
J1: Rail height	92			
L3: Rail length max.	3000			
L4: Spacing of fixing holes	105			
L5/L10: Position of first/last fixing hole	51			
Gew.: Rail weight, specific (kg/m)	55.3			

Available options for MR S 100



MR W 100 Dimensions and capacities



	MR W 100-A	MR W 100-B		
A: System height	120	120		
B: Carriage width	250	250		
B2: Distance between locating faces	75	75		
C1: Position of center front lube hole	12.5	12.5		
C3: Position of lateral lube hole	12.5	12.5		
C4: Position of lateral lube hole	40.3	67		
C7: Position of top lube hole	40.3	67		
J: Carriage height	100	100		
L: Carriage length	296.5	400		
L1: Exterior fixing hole spacing	150	200		
L2: Interior fixing hole spacing	-	-		
L6: Steel body length	204.5	308		
N: Lateral fixing hole spacing	220	220		
O: Reference face height	20	20		
Capacities and weights				
C0: Static load capacity (N)	976610	1470000		
C100: Dynamic load capacity (N)	401115	605000		
MOQ: Static cross moment capacity (Nm)	60645	91471		
MOL: Static longitud. moment capacity (Nm)	26143	39432		
MQ: Dyn. cross moment capacity (Nm)	24959	37646		
ML: Dyn. longitud. moment capacity (Nm)	10759	16229		
Gew: Carriage weight (kg)	27.0	40.0		

Available options for MR W 100

