



12.3 Technical data and options

12.3.4 AMSABS 4B Size 30


AMSABS 4B S 30 Drawings

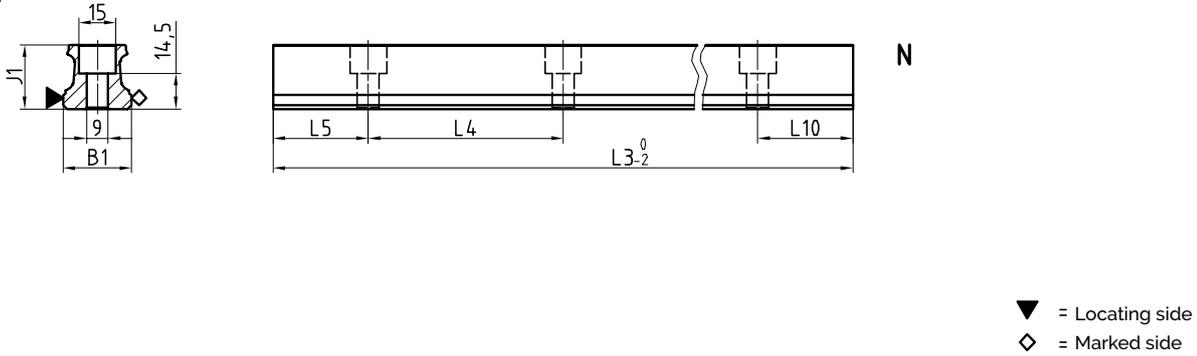


AMSABS 4B W 30 Drawings

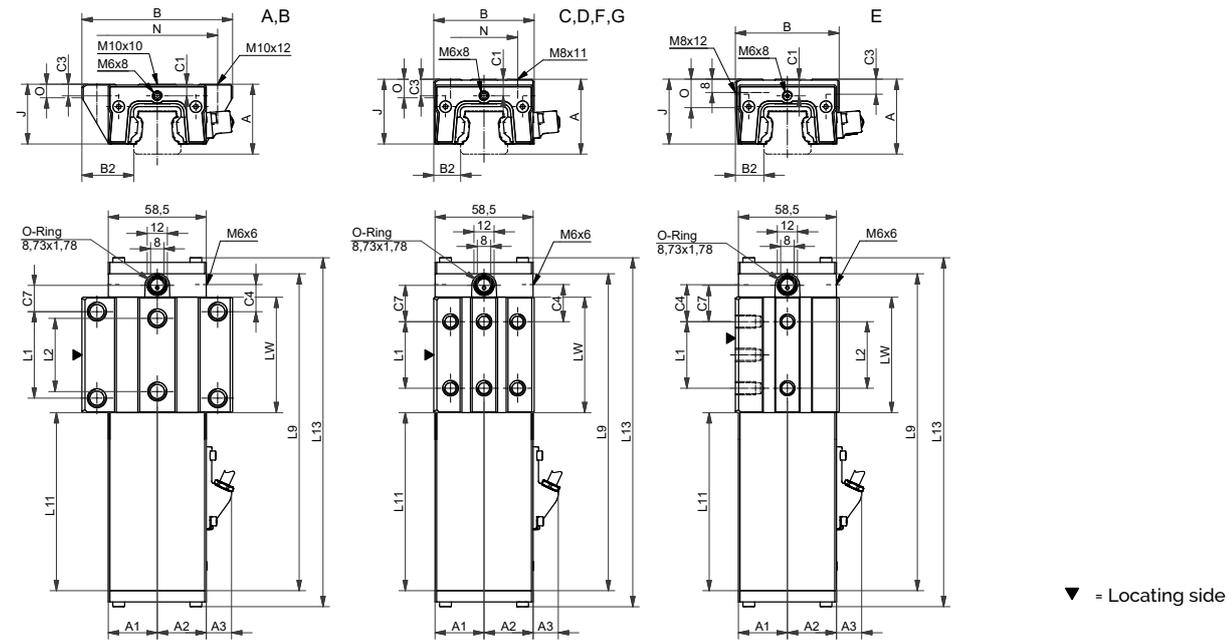

AMSABS 4B W 30 Rigidity diagram

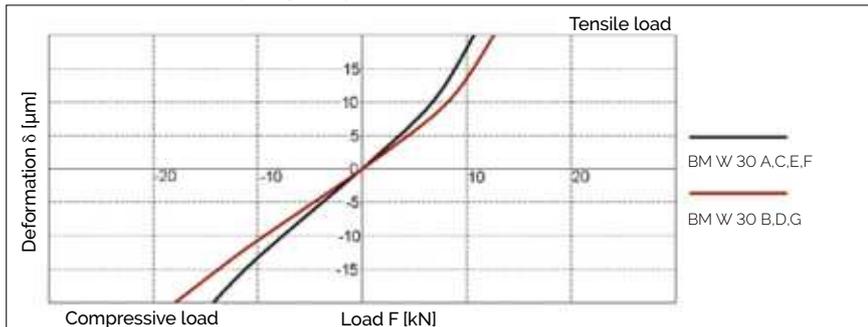

AMSABS 4B W 30 Load rating

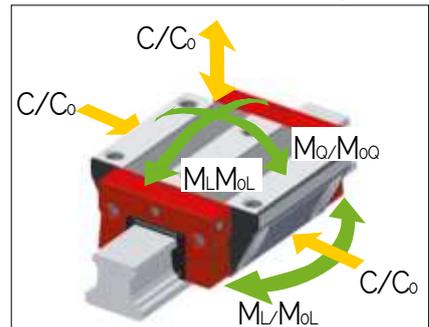

12.3 Technical data and options

AMSABS 4B Size 30 Dimensions and capacities



	AMSABS 4B S 30-N				
B1: Rail width	28				
J1: Rail height	26				
L3: Rail length max.	6000				
L4: Spacing of fixing holes	80				
L5/L10: Position of first/last fixing hole	38.5				
Rail weight, specific (kg/m)	4.3				

Available options for AMSABS 4B S 30



	AMSABS 4B W 30-A	AMSABS 4B W 30-B	AMSABS 4B W 30-C	AMSABS 4B W 30-D	AMSABS 4B W 30-E	AMSABS 4B W 30-F	AMSABS 4B W 30-G
A: System height	42	42	45	45	42	42	42
A1: Half width of housing on opposite side	29.3	29.3	29.3	29.3	29.3	29.3	29.3
A2: Half width of housing on reading head side	29.3	29.3	29.3	29.3	29.3	29.3	29.3
A3: Projection of reading head	14.4	14.4	14.4	14.4	14.4	14.4	14.4
B: Carriage width	90	90	60	60	62	60	60
B2: Distance between locating faces	31	31	16	16	17	16	16
C1: Position of center front lube hole*	7	7	10	10	10	7	7
C3: Position of lateral lube hole	6	6	9	9	10	7	7
C4: Position of lateral lube hole	16.2	27.2	22.2	23.2	22.2	22.2	23.2
C7: Position of top lube hole	15.7	26.7	21.7	22.7	21.7	21.7	22.7
J: Carriage height	35.9	35.9	38.9	38.9	38.9	35.9	35.9
L1: Exterior fixing hole spacing	52	52	40	60	40	40	60
L2: Interior fixing hole spacing	44	44	-	-	40	-	-
L9: Carriage length with housing	190.4	212.4	190.4	212.4	190.4	190.4	190.4
L11: Housing length	107	107	107	107	107	107	107
L13: Total length measuring carriage	209.9	231.9	209.9	231.9	209.9	209.9	231.9
Lw: Inner carriage body length	69.4	91.4	69.4	91.4	69.4	69.4	91.4
N: Lateral fixing hole spacing	72	72	40	40	-	40	40
O: Reference face height	7.8	7.8	11	11	17	11	11
Capacities and weights							
C0: Static load capacity (N)	63700	83300	63700	83300	63700	63700	83300
C100: Dynamic load capacity (N)	29200	35300	29200	35300	29200	29200	35300
MOQ: Static cross moment capacity (Nm)	1084	1414	1084	1414	1084	1084	1414
MQL: Static longitud. moment capacity (Nm)	829	1390	829	1390	829	829	1390
MQ: Dyn. cross moment capacity (Nm)	497	599	497	599	497	497	599
ML: Dyn. longitud. moment capacity (Nm)	380	589	380	589	380	380	589
Carriage weight (kg)	16	19	14	17	14	13	16

Available options for AMSABS 4B W 30

